


Saunders Membranventile Typ KB

Maße und Gewichte

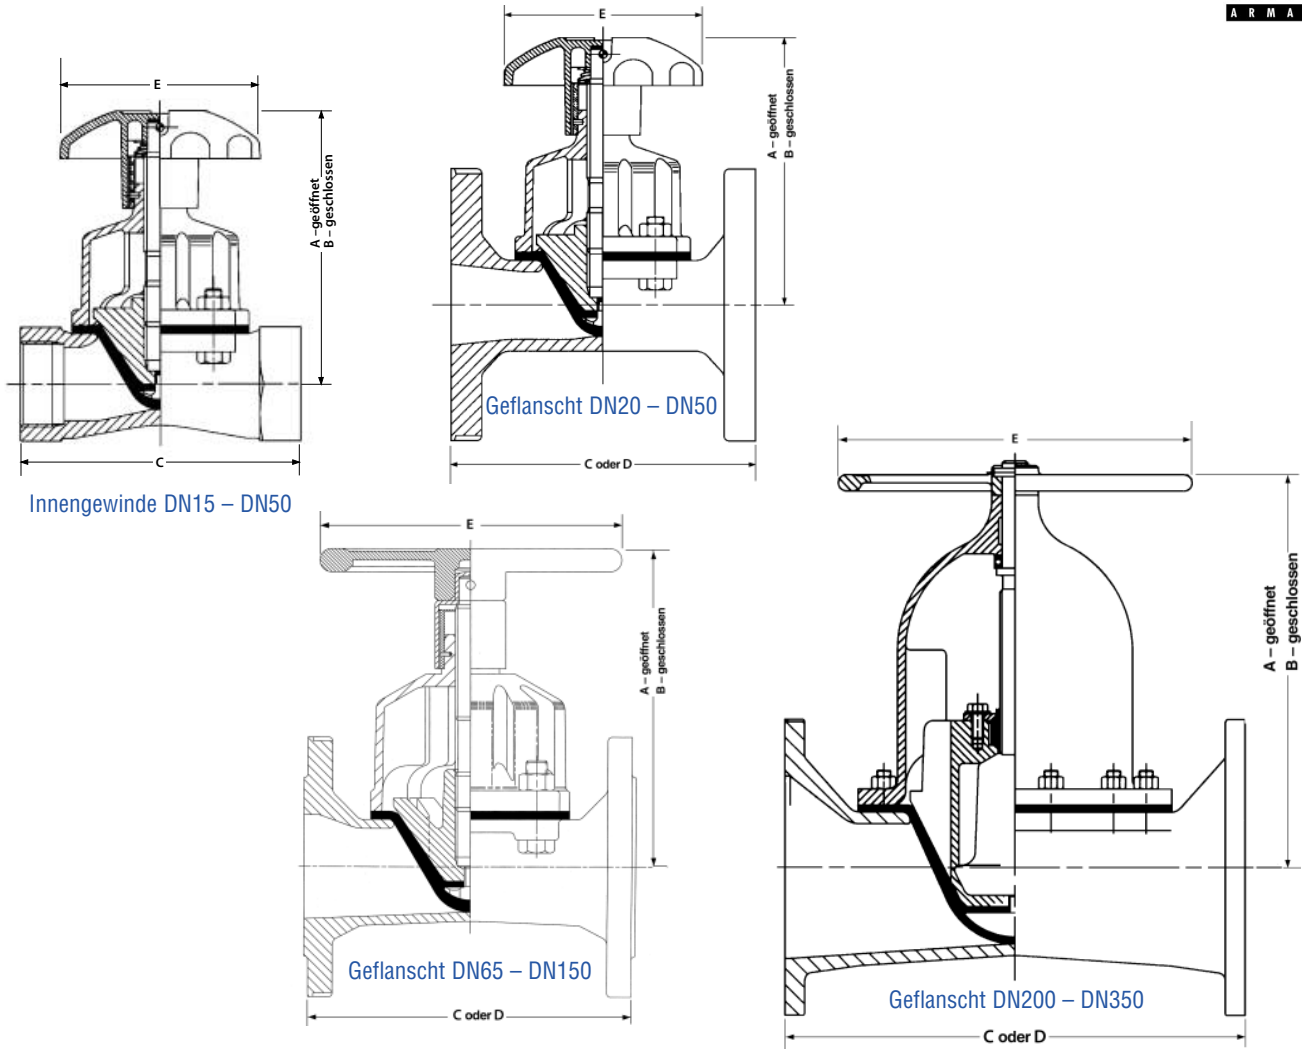

Nennweite (DN) Maße in mm

		100	125	150	200	250	300	350								
Innengewinde	A	106	166	166	182	-	-	-								
	B	98	159	159	162	-	-	-								
	C	63.5	111	143	168	-	-	-								
	Gewicht	0.82	2.0	2.7	4.8	-	-	-								
Geflanscht	A	105	105	165	165	165	176	234	270	313	335	435	406	557	628	665
	B	97	97	159	159	159	156	210	238	277	293	379	-	-	-	-
	C	108	117	127	146	159	190	216	254	305	356	406	521	635	749	980
	D	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980
	Gewicht	2.02	2.31	4.12	4.35	5.45	10.2	11.2	17.9	31.4	46.2	67.3	109	195	294	462
Geflanscht mit Gummiauskleidung	A	-	-	168	168	168	176	234	270	313	335	435	408	559	630	667
	B	-	-	162	162	162	156	210	238	277	293	379	-	-	-	-
	C	-	-	131	150	163	194	220	258	309	362	412	527	641	755	986
	D	-	-	160	180	200	230	290	310	350	400	480	600	730	850	980
	Gewicht	-	-	4.22	5.65	7.45	10.5	11.6	21.9	34.4	46.2	74.3	127	204	294	465
Geflanscht mit Glasauskleidung	A	-	106	166	166	166	177	235	271	314	336	436	407	558	629	666
	B	-	98	160	160	160	157	211	239	278	294	380	-	-	-	-
	C	-	119	133	148	165	196	222	260	311	364	414	523	637	751	982
	D	-	150	160	180	200	230	290	310	350	400	480	600	730	850	980
	Gewicht	-	2.52	4.2	5.05	6.95	10.3	11.4	20.3	33.9	46.1	71.6	118	201	294	462
	E	80	80	120	120	120	120	170	230	280	280	368	368	483	584	699

Gewichte in kg. **C** Ventillänge = EN 558-1 Reihe 7 (vo mals BS 5156). **D** Ventillänge = EN 558-1 Reihe 1 (vormals DIN 3202 Reihe F1).